

# DOORS | Quad Sliding Door

## The New Door on the Block

The newly developed QUAD is a SANS 613 certified mid-range single-glazed sliding door. This door is pitched firmly between our Eagle Patio Door and the Palace Sliding Door.

It is most suitable for residential and light commercial applications, offering an attractive contemporary look.

The door's name derives from the positive weather seals on all panels, limiting air leakage to a very impressive extent.

Adjustable tandem stainless steel rollers ensure smooth and trouble-free operation with 80kg panel capacity.

Profiles are minimalistic, yet both robust and elegant, providing substantial daylight openings.

### Performance

- Air leakage - 81% better than allowed
- Green Range against SANS 204 defaults:
  - 40% better U-Value
  - 62% better SHGC

### Key Features:

- CISA hook lock for added security
- Compatible with 105mm or deeper C44 frames.
- Stiles can accommodate 32mm pull handle
- 4 rows of weatherpile at all vertical meeting points

### Configurations:

- Available in 2 & 4 panel options
- Coming soon in 3 & 6 panel options
- 2 interlocker combinations available




SANS 613 Certified A3 • Strong • Air Tight • Energy Efficient • Unique Design

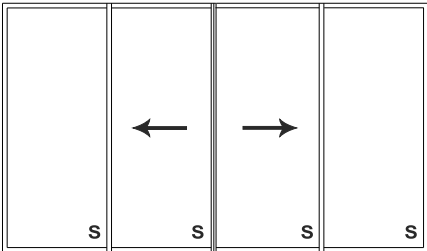


# DOORS | Quad Sliding Door


## In a Class of its Own!

The unique **Quad Seal System** seals 4x better resulting in an air and water tight door.

2 PANEL SLIDER		Width	2100(h)
CONFIGURATION OX/XO		2100(h) - 2400(h)	Interlocker
	1500	L/H	
	1500	H/H	
	1800	L/H	
	1800	H/H	
	2100	L/H	
	2100	H/H	
	2400	L/H	
	2400	H/H	
	2700	L/H	
	2700	H/H	
3000	L/H		
3000	H/H		

4 PANEL SLIDER		Width	2100(h)
CONFIGURATION OXXO		2100(h) - 2400(h)	Interlocker
	3000	L/H	
	3000	H/H	
	3300	L/H	
	3300	H/H	
	3600	L/H	
	3600	H/H	
	4000	L/H	
	4000	H/H	
	4200	L/H	
	4200	H/H	
	4500	L/H	
	4500	H/H	
	4800	L/H	
	4800	H/H	
	5400	L/H	
	5400	H/H	
	5700	L/H	
	5700	H/H	
	6000	L/H	
	6000	H/H	

## 105mm PTT SIDELIGHTS

	Width
	2100(h) - 2400(h)
	600
	900

### Notes:

- Additional charges for cylinder and handle
- Configuration to be specified when ordering
- Only available in OX/XO and OXXO configuration

### Interlocker Configuration:

- Low Profile/High Profile L/H
- High Profile/High Profile H/H